

**Engine**

Engine type	3 cylinder, water cooled, 4 cycle, Vertical In-Line Common Rail Direct Injection (CRDI)
Fuel	Diesel
Displacement	1.80 L
Max Torque	115.0 Nm
Gross Power (ECE-R120)	34.9 HP
Net Power	32.9 HP
Rated revolution	2600.0 RPM
Alternator	12V/75A
Air Cleaner	Dry type, replaceable
Fuel tank	34.00 L

**Drive Train**

Transmission	Manual 12F/12R
Shuttle Type	Synchro shuttle
Max. Travelling Speed Forward	25.0 km/h
Max. Travelling Speed Reverse	24.4 km/h
Steering	Hydrostatic Power Steering
Turning radius(w/brake)	2450.0 mm
Brake type	Wet disc type
Mechanical differential lock	Rear Std.

**Hydraulic System**

Implement Pump	26.00 L/min
Power steering pump	16.90 L/min
Total hydraulic flow	42.90 L/min
No. of Std. remote valve's ports (Rear)	Std. (2 port)

**Hitch**

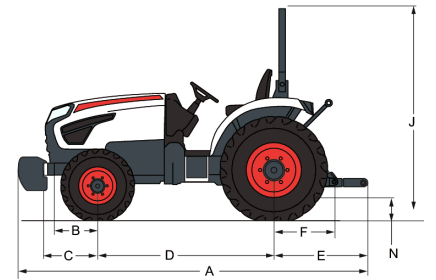
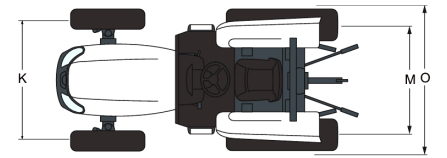
3-point lift control type	Position
3-point hitch type	Category 1
Lower Link type	Ball
Lift capacity at lift point	1030 kg
Lift capacity at 610 mm (24 in.) behind lift point	740 kg

**PTO**

Max PTO Power	31.0 HP
Rear PTO type	Independent
Rear PTO speed	540/540E RPM
Mid PTO speed (Optional):	2000.0 RPM

**Tires**

Agriculture Tires	Front: 7-16 R1 / Rear: 11.4-24 R1
Turf tires	Front: 27x8.5-15 R3 / Rear: 41x14.0-20 R3
Industrial Tires	Front: 25x8.5-14 R4 / Rear: 15-19.5 R4

**Dimensions**


Values measured on AG. Tires

(A)	3486.5 mm	(J)	2500.0 mm
(B)	546.0 mm	(K)	1126.0 mm
(C)	668.0 mm	(M)	1102.0 mm
(D)	1670.0 mm	(N)	331.0 mm
(E)	812.0 mm	(O)	1385.0 mm
(F)	626.0 mm		

**Weights**

Weight with ROPS	1410 kg
------------------	---------

**Standard Features**

4 Wheel Drive	Engine Hood, one piece
Tilt Steering	Vinyl Suspension Seat, w/retractable seat belt
Rear folding ROPS	Battery
PTO Cover	Horn
Stationary PTO	Rear View Mirror
Auto PTO	Cup holder
Front Hitch	OPC
7 Pin Socket	Floor mat
12V Aux	Toolbox
Beacon Ready Wiring	