

Engine

Engine type	3 cylinder, water cooled, 4 cycle, Vertical In-Line Common Rail Direct Injection (CRDI)
Fuel	Diesel
Displacement	1.80 L
Max Torque	118.0 Nm
Gross Power (ECE-R120)	39.6 HP
Net Power	37.6 HP
Rated revolution	2600.0 RPM
Alternator	12V/75A
Air Cleaner	Dry type, replaceable
Fuel tank	34.00 L

Drive Train

Transmission	HST, 3 range
Shuttle Type	Hydrostatic Drive
Max. Travelling Speed Forward	25.5 km/h
Max. Travelling Speed Reverse	17.6 km/h
Steering	Hydrostatic Power Steering
Turning radius(w/brake)	2450.0 mm
Brake type	Wet disc type
Mechanical differential lock	Rear Std.

Hydraulic System

Implement Pump	26.00 L/min
Power steering pump	16.90 L/min
Total hydraulic flow	42.90 L/min
No. of Std. remote valve's ports (Rear)	Std. (4 port)

Hitch

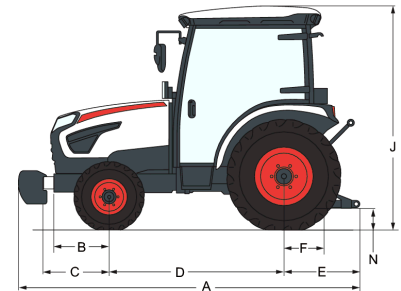
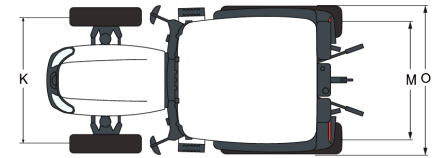
3-point lift control type	Position
3-point hitch type	Category 1
Lower Link type	Telescope
Lift capacity at lift point	1030 kg
Lift capacity at 610 mm (24 in.) behind lift point	740 kg

PTO

Max PTO Power	33.0 HP
Rear PTO type	Independent
Rear PTO speed	540/540E RPM
Mid PTO speed	2000.0 RPM

Tires

Agriculture Tires	Front: 7-16 R1 / Rear: 11.4-24 R1
Turf tires	Front: 27x8.5-15 R3 / Rear: 41x14.0-20 R3
Industrial Tires	Front: 25x8.5-14 R4 / Rear: 15-19.5 R4

Dimensions


Values measured on AG. Tires

(A)	3486.5 mm	(J)	2352.0 mm
(B)	546.0 mm	(K)	1126.0 mm
(C)	668.0 mm	(M)	1102.0 mm
(D)	1670.0 mm	(N)	331.0 mm
(E)	812.0 mm	(O)	1385.0 mm
(F)	626.0 mm		

Weights

Weight with CABIN	1652 kg
-------------------	---------

Standard Features

4 Wheel Drive	7 Pin Socket
Tilt Steering	12V Aux
HST Cruise	Beacon Ready Wiring
HST RPM Link	Engine Hood, one piece
Cabin w/HVAC, Sunvisor, Front/Rear work lights	Textile Suspension Seat, w/retractable seat belt
PTO Cover	Battery
Stationary PTO	Horn
Auto PTO	Rear View Mirror
Joystick Lever	Cup holder
Front Hitch	OPC
Fuel Heater	Floor mat
PTO Cruise	Toolbox